




SiSiB® PC1130 SILANE

- 1 -

CHEMICAL NAME

gamma-Aminopropylmethyldimethoxysilane

CHEMICAL STRUCTURE

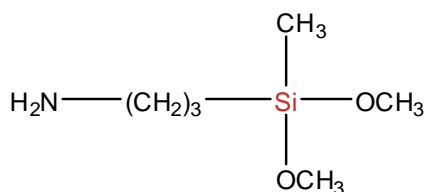

INTRODUCTION

SiSiB® PC1130 is a colorless to yellowish liquid with an amine-like odor which is soluble in alcohols and aliphatic and aromatic hydrocarbons.

SiSiB® PC1130 acts as an adhesion promoter between inorganic materials and organic polymers, as a surface modifier and for material changes to chemical substances.

TYPICAL PHYSICAL PROPERTIES

CAS No.	3663-44-3
EINECS No.	222-919-8
Formula	C ₆ H ₁₇ NO ₂ Si
Molecular Weight	163.29
Boiling Point	Min.200°C [760mmHg]
Flash Point	69°C
Color and Appearance	Colorless transparent liquid
Density _{25/25°C}	0.945
Refractive Index	1.4200[25°C]
Purity:	97.0%

APPLICATIONS

Power Chemical
ISO9001 ISO14001 certified

Copyright© 2008 Power Chemical Corporation Ltd.
SiSiB® is a registered trademark of PCC. For more knowledge regarding organosilanes, you may visit www.SiSiB.com or www.PCC.asia



SiSiB® PC1130 SILANE

- 2 -

SiSiB® PC1130 is an important or even essential constituent in many applications. SiSiB® PC1130 is particularly important as an additive to cold-curing phenolic and furan foundry resins to improve the flexural strength of sand/resin elements with very long shelf life of the resins.

Further examples are:

- Glass fiber/glass fabric composites: as size constituent or finish
- Glass and metal primers
- Abrasives: as additive to phenolic resin binders
- Sealants and adhesives: as primer or additive and for chemical modification
- Mineral-filled composites: for pretreatment of fillers and pigments or as additive
- Synthesis of functional silicones

The most important effects which can be achieved using PC1130 are improvements in product properties, such as

- Adhesion
- Mechanical properties, for example flexural strength, tensile strength, impact strength and modulus of elasticity
- Moisture and corrosion resistance
- Electrical properties, for example dielectric constant, volume resistivity

And improvements in processing properties, such as

- Better filler dispersion
- Rheological behavior: reduction in viscosity, Newtonian behaviour
- Higher degree of filling

PACKING AND STORAGE

SiSiB® PC1130 is supplied in 180Kg steel drum or 900Kg IBC container.

In the unopened original container SiSiB® PC1130 has a shelf life of one year in a dry and cool place.

NOTES

All information in the leaflet is based on our present knowledge and experience. We

Power Chemical
ISO9001 ISO14001 certificated

Copyright© 2008 Power Chemical Corporation Ltd.
SiSiB® is a registered trademark of PCC. For more knowledge regarding organosilanes, you may visit www.SiSiB.com or www.PCC.asia



SiSiB[®] PC1130 SILANE

- 3 -

reserve the right to make any changes according to technological progress or further developments. Performance of the product described herein should be verified by testing.

We specifically disclaim any other express or implied warranty of fitness for a particular purpose or merchantability. We disclaim liability for any incidental or consequential damages.

Please send all technical questions concerning quality and product safety to: silanes@SiSiB.com.

Power Chemical
ISO9001 ISO14001 certificated

Copyright© 2008 Power Chemical Corporation Ltd.
SiSiB[®] is a registered trademark of PCC. For more knowledge regarding organosilanes, you may visit www.SiSiB.com or www.PCC.asia