

PowerNox™ 1680


New Materials Creating New Performances

**Quality Products.
Dependable Service.**

CHEMICAL NAME

Tris(2,4-di-tert-butylphenyl) phosphite

CHEMICAL STRUCTURE

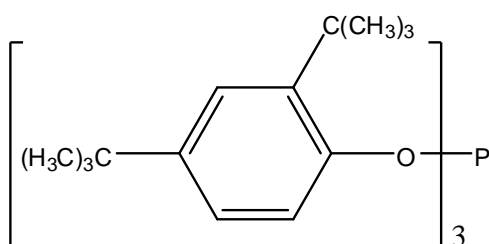

INTRODUCTION

PowerNox™ 1680 is a secondary antioxidant for organic polymers. Applications include polyolefins, polycarbonate, polyester, and styrenics

PHYSICAL PROPERTIES

CAS No.	31570-04-4
EC No.	250-709-6
Formula	C ₄₂ H ₆₃ O ₃ P
Molecular Weight	647
Specific gravity	1.03
Melting Point(°C)	183-186
Acid Value (mgKOH/g)	Max.0.2
Volatile Loss(%)	Max.0.3
Color of Solution 425nm(%)	Min.97
Color of Solution 500nm(%)	Min.98
Appearance	White Crystal Powder
Ash(%)	Max.0.1

All information in the leaflet is based on our present knowledge and experience. We reserve the right to make any changes according to technological progress or further developments. Performance of the product described herein should be verified by testing. We specifically disclaim any other express or implied warranty of fitness for a particular purpose or merchantability. We disclaim liability for any incidental or consequential damages.

Copyright © TinToll Performance Materials Co., Ltd. www.TinToll.com.



PowerNox™ 1680

New Materials Creating New Performances

**Quality Products.
Dependable Service.**

2,4-DTBP Content(%)	Max.0.2
Min. Purity	99%

Solubility (20°C)	% w/w
Acetone	1.8
Benzene	34
Chloroform	36
Cyclohexane	16
Ethyl acetate	4
n-Hexane	11
Methanol	<0.01
Dichloromethane	36
Toluene	40.5
Water	<0.01

APPLICATIONS

PowerNox™ 1680 can be used as melt flow and color protection during thermal processing of polymers.

PowerNox™ 1680 can be used in combination with hindered phenol.

PowerNox™ 1680 can be used with benzotriazoles and HALS for thermal and light stabilization in outdoor use.

HANDLING AND STORAGE

In accordance with good industrial practice, handle with care and avoid unnecessary personal contact. Avoid continuous or repetitive breathing of dust. Use only with adequate ventilation. Protect skin. Avoid dust formation and ignition sources.

This product may be stored up to one year in a sealed container. Containers should be stored in a cool, dry area. Extended storage at elevated temperatures or exposure to direct heat or sunlight could reduce product life. Keep containers sealed when not in use.

All information in the leaflet is based on our present knowledge and experience. We reserve the right to make any changes according to technological progress or further developments. Performance of the product described herein should be verified by testing. We specifically disclaim any other express or implied warranty of fitness for a particular purpose or merchantability. We disclaim liability for any incidental or consequential damages.

Copyright © TinToll Performance Materials Co., Ltd. www.TinToll.com.



PowerNox™ 1680

New Materials Creating New Performances

**Quality Products.
Dependable Service.**

For more detailed information please refer to the material safety data sheet.

PACKING

PowerNox™ 1680 is supplied in 20Kg Paper Bag, 20Kg PE Bag, 25Kg Carton Box, 50Kg Fiber Drum.

All information in the leaflet is based on our present knowledge and experience. We reserve the right to make any changes according to technological progress or further developments. Performance of the product described herein should be verified by testing. We specifically disclaim any other express or implied warranty of fitness for a particular purpose or merchantability. We disclaim liability for any incidental or consequential damages.
Copyright © TinToll Performance Materials Co., Ltd. www.TinToll.com.

